


Dymatrix™ MPV **Multiport Manifold Valves**

- Reduce space, fittings and dead legs in your system
- Unique zero dead leg diaphragm with full flush capabilities
- Custom designed manifolds are available in 2 to 4 weeks from our Boston manufacturing facility.

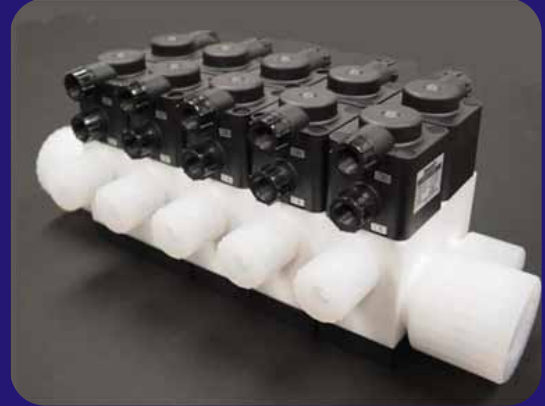

Product Benefits

- Fully customizable manifold and combo valve configurations
- Special diaphragm eliminates dead space and particle generation
- Diaphragm design allows the manifold to be fully flushed between processes
- Inlet port can fully recirculate for high purity or branch requirements
- High cycle life ensures reliable performance in critical applications

Specifications

Wetted Material: PTFE (natural)

Size Range: 1/4" - 1" (6 - 25 mm)

End Connections: Flare, Pillar™, NPT

Pressure Rating: 72.5 psi

Actuator: A-S NC/NO, A-A, Manual

Media: Chemicals, Slurry and UPW

Alternative choices for above specifications available upon request. Pillar™ is a registered trademark of Nippon Pillar Co.

